


TM-120500/ TM-240500LM A/V Transmitter Module

Feature


- 1.2 & 2.4GHz Band frequency transmission option
- Highly integrated circuit / High power output (0.5Watt)
- High Reliability/Linearity/AlGaAs/GaAs FET power amplifier module built-in
- Using digital phase-Lock-Loop circuit without drifting problem under high temp. Occasion
- Ultra-mini compact size, ultra low power consumption



Specification

| Item Number | TM-120500LM | TM-240500LM |
|---------------------|--------------------|--------------------|
| Frequency Band | 1200MHz | 2400MHz |
| Available Channel | 3 Ch | 8 Ch |
| Audio Sub-Carrier | 5.5 Mhz | 6.5MHz |
| Trans. Range | 200~500 Meter | |
| Consumption Current | 450 mA | |
| Output Power | 500 mW | |
| Operation Voltage | 5~5.5 V | |
| Power Supply | 5V / 500mA | |
| Antenna Connector | SMA Connector | |
| Weight (TX) | 10 g | |
| Dimension (TX) | 24x 28x 7 mm | |
| Matched Receiver | RX-1260 & RX-1280B | RX-2460 & RX-2480B |

Mechanical Sketch

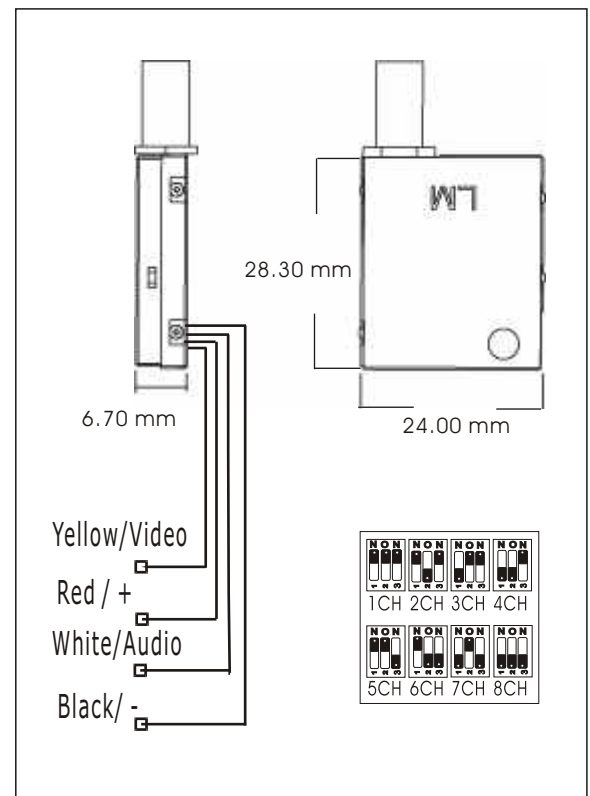

***Specification & appearance may be subjected to change without notice**

Standard Shipping Package

- AV Transmitter Module *1
- Standard Dipole Antenna *1
- AV & power Switching Cable *1

LawMate

E-Mail:sales@lawmate.com.tw
URL://www.lawmate.com.tw

Manufactured & Distributed By LawMate Technology
TEL:886-2-8797-5728 FAX:886-2-8797-5727

Law Enforcement & Security Products Manufacturer LawMate Technology Co.,LTD.